


BD DRYERS

Adsorption air dryers with external heat

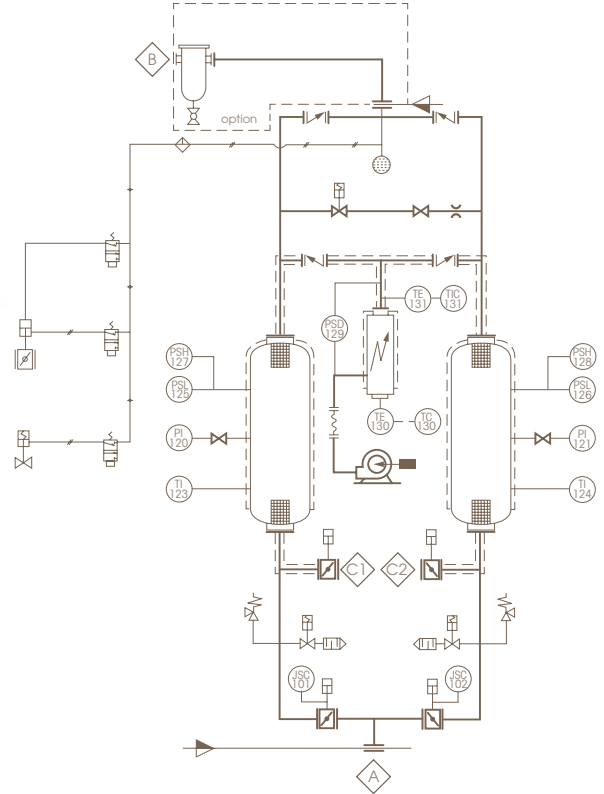

TECHNICAL SPECIFICATIONS

Model	Flow rate m ³ /h	Connection	Installed Power kW
BD 60	600	2"	9,00
BD 100	1 000	2" 1/2	15,00
BD 140	1 400	2" 1/2	19,00
BD 190	1 900	3"	25,00
BD 250	2 500	3"	32,00
BD 340	3 400	4"	43,00
BD 400	4 000	4"	50,00
BD 540	5 400	6"	65,00
BD 640	6 400	6"	77,00
BD 780	7 800	8"	90,00
BD 1000	10 000	8"	102,00

Security components:

- Diagram of the control panel
- Dew point indicator
- Power-save system
- Dew point analyser
- Communication card RS 232
- Cycle time management

Warranty: 2 years part warranty (excluding consumables) except electrical heater

Commissioning not included in the sale price.

- > Air inlet temperature 30°C
- > Dew point -40/-70°C
- > Relative pressure 7 bar

LEGEND

- Shut-off valve
- 2-way pneumatic valve
- Pneumatic butterfly valve
- Check valve
- Filter
- 3-way solenoid valve
- Switch
- Pressure gauge
- Thermometer
- Low-pressure switch
- High-pressure switch
- Thermocouple
- Temperature controller
- Temperature controller with indicator light
- Suction filter

- Air inlet
- Air outlet
- Exhaust